

**Semi-automatic horizontal wrapper FV300/50. Item n° 31.3001**



## Features

**Product dimensions :**

- |                            |   |
|----------------------------|---|
| - Length maximum / minimum | No limit / 250 mm or 150 mm with wedge / bridge |
| - Width and height         | See diagram                                     |


**Electrical equipment :**

- |                         |   |
|-------------------------|---|
| - Electric current      | 230 V   |
| - Motor                 | 0.36 KW                                       |
| - Flexibility           | 24 V c.c                                      |
| - Power consumption     | 0.26 Kw                                       |
| - Speed of ring rotatie | 5 to 350 rpm                                  |
| - Speed variators       | Omron   |
| - Programmable PLC      | Omron   |
| - Air pressure          | 6 bars (for configuration with cutter system) |

**Dimensions coils stretchfilm or paper \*:**

- |                      |                         |
|----------------------|-------------------------|
| - Width              | 100 mm                  |
| - Thickness          | 17, 20,23 ou 30 microns |
| - Ø outside / inside | 200 / 38 mm             |
| - Colour             | Transparent / opaque    |

(\* ) Only for configuration without cutter system

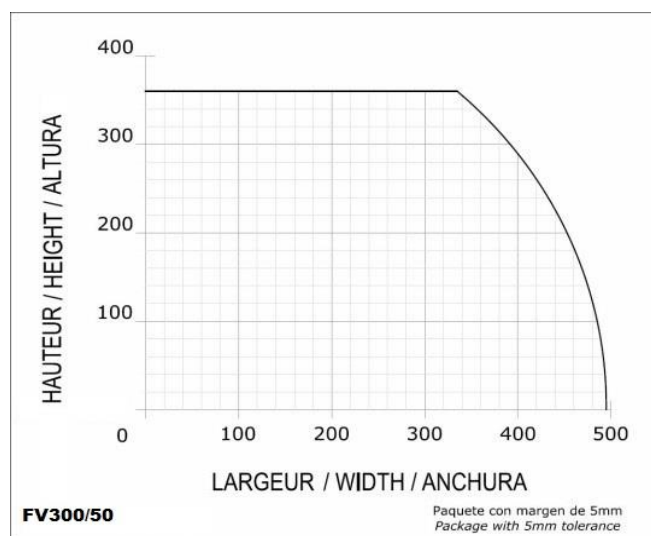

## Benefits

---

- Steel structure
- Rotating ring mounted on structure.
- Double carriage: work with one coil for easy wrapping, with two coils for reinforced wrapping or higher speed of packaging (possibility to use stretchfilms with different widths)
- Coil self-locking system for a quick change without tools.
- Adjustable stretchfilm tension according to the product to be wrapped.
- Adjustable ring speed to measure the film overlap on the product.
- Stopping device for coil change for the safety of the operator.
- Security pedal to enable / disable the wrapping cycle.
- Trapezoidal belt transmission system (less maintenance)
- Switchboard / Control Panel: main switch, pilot line / alarm, reset and emergency stop button.
- Packing on wood pallet for transport.
- Complies with CE norms for safety and machine manufacture (2006/42/CE, 2004/42/CE & 93/68/CEE).

## Accessories

---

- Automatic stretchfilm cutting and pinching system for 2 coils.
- Conveyors for rolling in and out of the product.
- Conveyor with rolls.
- Vertical rollers in the "V-shape".
- Cale / bridge for short products.
- Top press with manual adjustment.
- Wheels with brakes.
- Manual dispenser for reel film bubble up to 600 mm