

Semi-automatic horizontal wrapper FV300/90. Item n° 31.3002**Features****Product dimensions:**

- | | |
|----------------------------|---|
| - Length maximum / minimum | No limit / 350 mm or 250 mm with wedge / bridge |
| - Width and height | See diagram |


Electrical equipment:

- | | |
|--------------------------|---|
| - Electric current | 230 V |
| - Motor | 0.55 KW |
| - Flexibility | 24 V c.c |
| - Power consumption | 0.31 Kw |
| - Speed of ring rotation | 5 to 200 rpm |
| - Speed variators | Omron |
| - Programmable PLC | Omron |
| - Air pressure | 6 bars (for configuration with cutter system) |

Dimensions coil stretch film or paper *:

- | | |
|----------------------|-------------------------|
| - Width | 100 or 166 mm |
| - Thickness | 17, 20,23 or 30 microns |
| - Ø outside / inside | 200 / 38 mm |
| - Colour | Transparent / opaque |

(*)Only for configuration without Cutter system

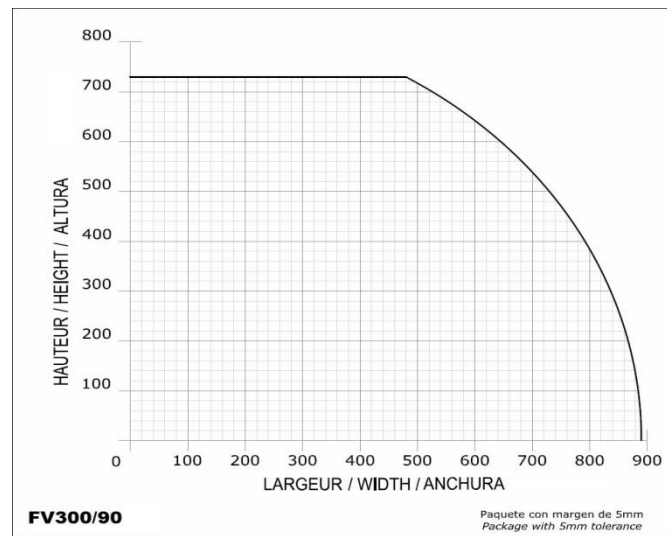

Benefits

- Steel structure
- Rotating ring mounted on structure.
- Double carriage: work with one coil for easy wrapping, with two coils for reinforced wrapping or higher speed of packaging (possibility to use stretchfilms with different widths)
- Coil self-locking system for a quick change without tools.
- Adjustable stretchfilm tension according to the product to be wrapped.
- Adjustable ring speed to measure the film overlap on the product.
- Stopping device for coil change for the safety of the operator.
- Security pedal to enable / disable the wrapping cycle.
- Trapezoidal belt transmission system (less maintenance)
- Switchboard / Control Panel: main switch, pilot line / alarm, reset and emergency stop button.
- Packing on wood pallet for transport.
- Complies with CE norms for safety and machine manufacture (2006/42/CE, 2004/42/CE & 93/68/CEE).

Accessories

- Automatic stretchfilm cutting and pinching system for 2 coils.
- Conveyors for rolling in and out of the product.
- Conveyor with rolls.
- Vertical rollers in the “V-shape”.
- Cale / bridge for short products.
- Top press with manual adjustment.
- Wheels with brakes.
- Manual dispenser for reel film bubble up to 600 mm